


Product data sheet

ISM guide rail Boxern

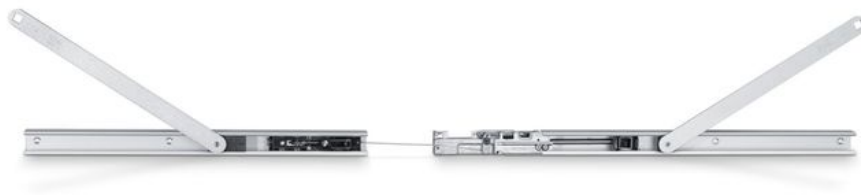

With closing sequence control and lever

AREAS OF APPLICATION

- Double leaf doors with closing sequence control
- Integrated installation
- Right and left single-action doors
- Symmetrical and asymmetrical division of door possible
- For passive leaves from 540 mm
- Minimum hinge clearance 1300 mm, minimum width of passive leaf 540 mm

ISM guide rail Boxern



PRODUCT FEATURES

- Closing sequence control holds the active leaf in the waiting position until the passive leaf is closed
- Vandalism protection through flexible Bowden cable
- Flexible repositioning of the Bowden cable release mechanism in the frame, e.g. with passive leaf lockings
- With screwed slide block
- Minimal installation effort due to low number of individual parts and quick setting

TECHNICAL DATA

Productname	ISM guide rail Boxern
Minimum hinge clearance	1300 mm
Minimum passive leaf width	540 mm
Standard conformity	EN 1158
Width	31 mm
Height	30 mm
Hold-open function	Optional
Smoke switch integrated	No
Closing sequence control integrated	Yes
Flexible opening restrictor	Yes

VARIANTS / ORDER INFO

Designation	Description	Ident-No.	Colour
ISM guide rail Boxern	with integrated closing sequence control and levers	114141	silver-coloured

ACCESSORIES

FLEXIBLE OPENING RESTRICTOR

For E and R guide rails, single and double leaf



Designation	Description	Ident-No.
Flexible opening restrictor	for guide rail 1-leaf: TS 5000 E/R/RFS (door leaf installation), Boxer E; 2-leaf: all E/R/ISM variants TS 5000 (incl. VPK) and Boxer	145311